


KW-PPBM, PIPE BEVELING MACHINE WITH REMOTE CONTROL

APPEARANCE




FEATURES

- Designed for beveling the pipe automatically along the outer surface of the pipe.
- Widely 0~45° facing is feasible along with the guide rail.
- Travel speed is adjustable depend on pipe wall thickness and motor load while beveling.
- Applicable pipe diameter : O.D 450~2000mm. (18"~80")
- Self propelling function provided.
- Remote controls in 10Meters.

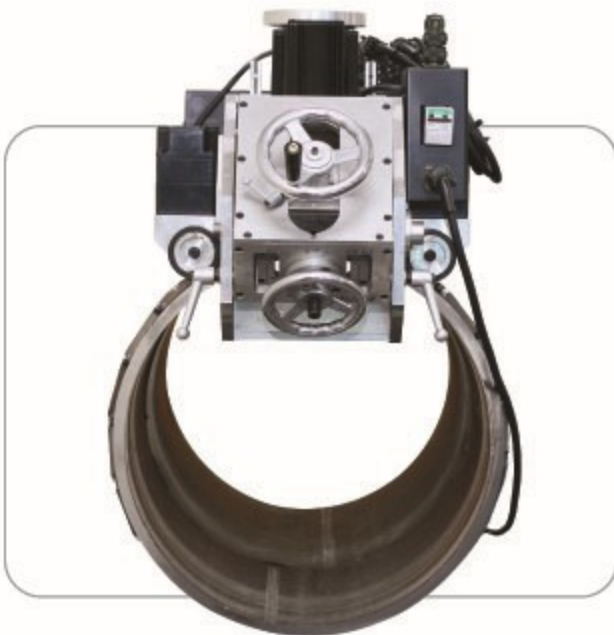

REMOTE

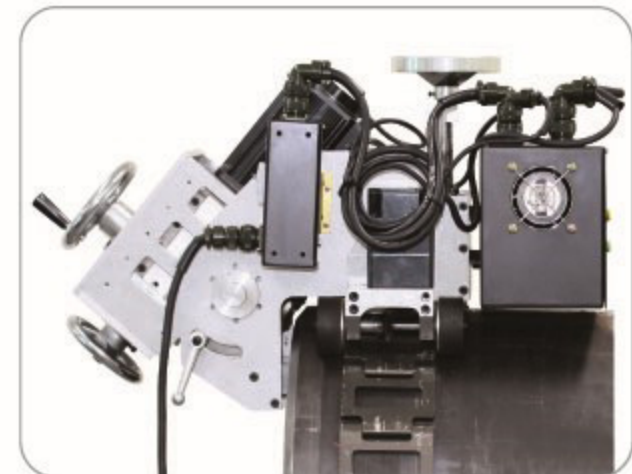

MAJOR PARTS	DESCRIPTIONS	SPECIFICATIONS
General	Size in mm(WHL), Weight	710 x 412 x 460, 45Kg
	Input power	AC 220V, 12A, 50-60Hz
Workable range	Pipe Capacity	450-2000mm diameter
	Pipe Wall Thickness	Max 30mm thickness
	Pipe Length	Min 500mm
	Bevel Angle	0°~45°
Cutter	Spindle Motor	2.0KW
	Spindle RPM	3000rpm
Travel	Travel Motor	100W
	Travel Speed	140-990mm/min
Travel Method	Aluminum Guide Rail	Refer to Guide rail composition table