

KW-PLBM


PLATE BEVELING MACHINE



FEATURES

- Designed for beveling the plate automatically along the side of plate.
- Feasible for beveling 15mm thick plate by one rotation. (30mm thick plate by 2 ~ 3 rotations with an optional cutter)
- Widely adjustable bevel angle : 0 ~ 40°.
- Applicable plate thickness : up to 30T.
- Required plate width for mounting the machine : 230mm. (min)
- Self propelling and automatic stop fuction provided.


0° Facing

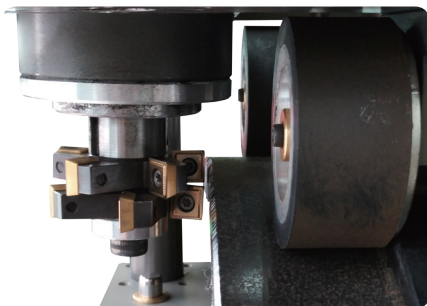

Wide Angle



Mounting

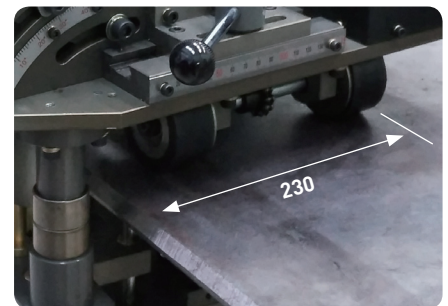

MAJOR PARTS	DESCRIPTIONS	SPECIFICATIONS
General	Size in mm(WLH) & Weight	440 x 480 x 300, 29kg
	Input Power	1Ph, 200 ~ 240VAC, 50 ~ 60Hz
Applicable Plate Work-piece	Plate Width	Min. 230mm
	Plate Thickness	15T by one rotation with a standard cutter 30T by 2 ~ 3 rotations with an optional cutter
Spindle Unit	Spindle Motor Power	BLDC Motor
	Cutter	Ø 63.5 x 2 blades cutter
Travel Unit	Travel Speed	0 ~ 400mm/min (depended on thickness)
	Travel Motor Power	BLDC Motor
Tilting Unit	Bevel Angle	0° ~ 40°