


KW-FW2A[AC], KW-FW2B[Battery]

FILLET & BUTT WELDER, WALL TRAVEL, DUAL TORCH, STITCH & CONTINUOUS


APPEARANCE

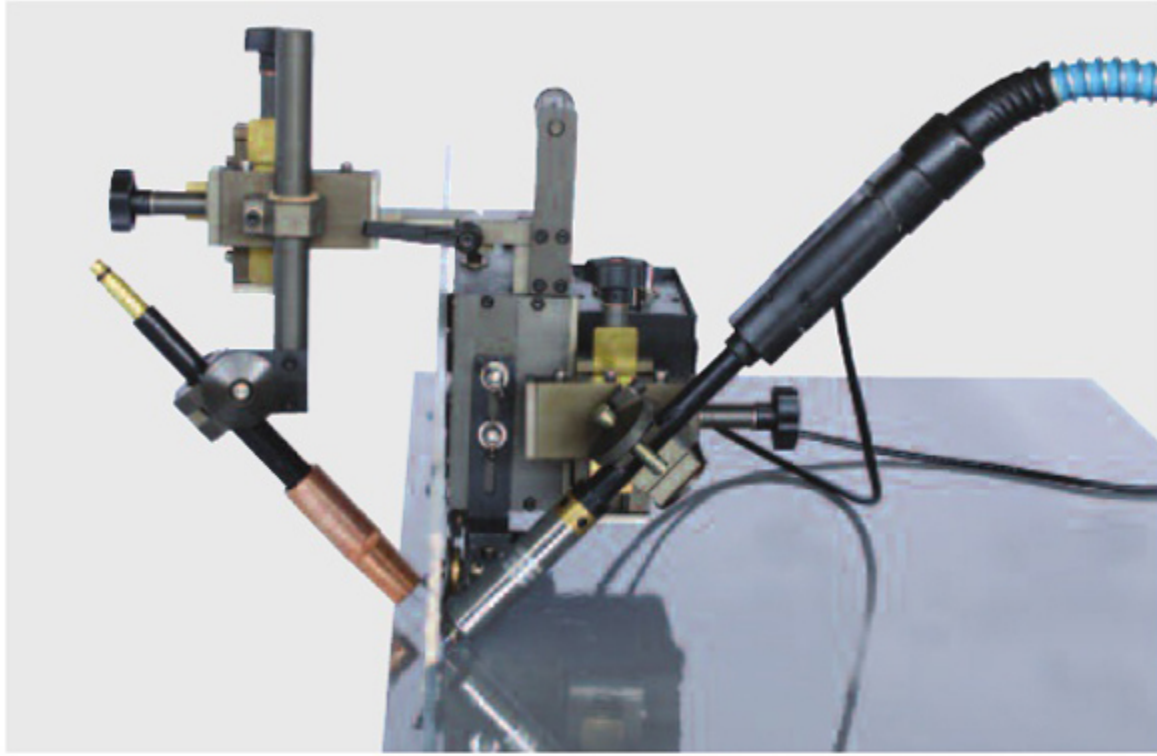


FEATURES

- Dual torch, wall driving
- Stitch & continuous welding.
- X-Y slider helps setting torch widely
- Both mechanized & manual torches useful.
- Max pulling power 20kgf and Max. 30° climbable.
- Crate filling time at the beginning and ending of the welding can be controlled for 0~3 seconds.
- Travel speed in cm/min or inch/min programmable.
- Battery power, 18Vdc 4.0Ah lithium-ion, 8-10Hrs use


BUTT WELDING

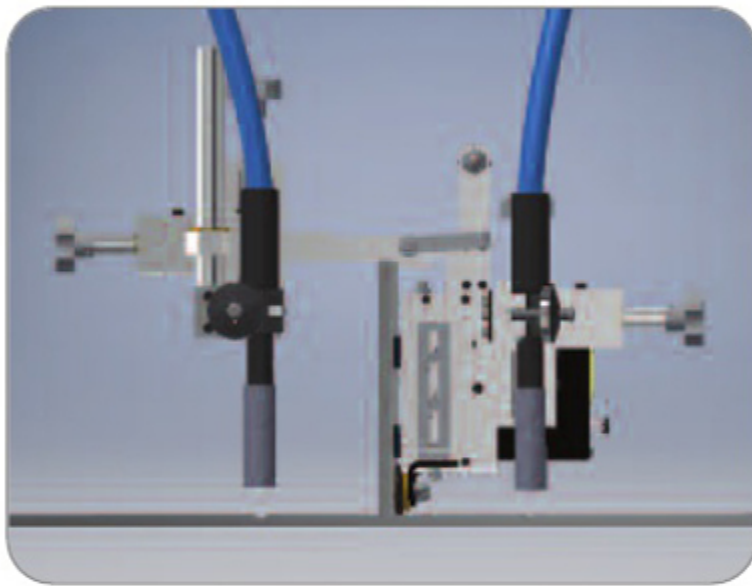

FILLET WELDING

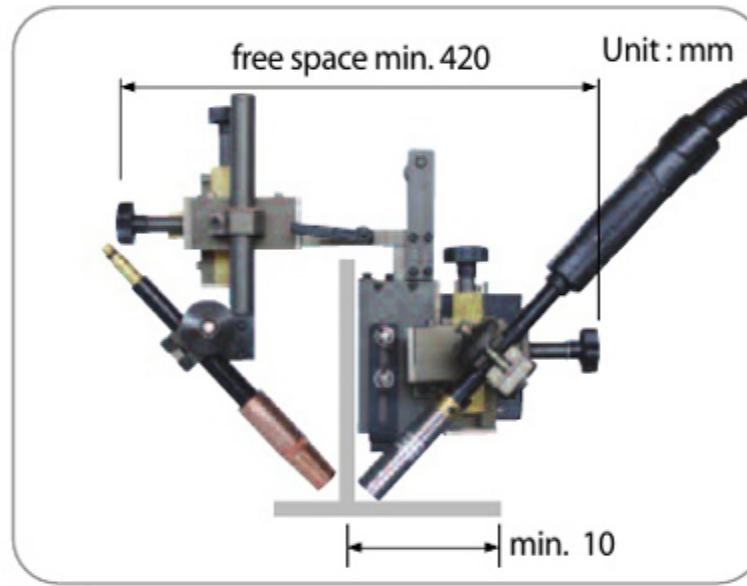

WORKPIECE

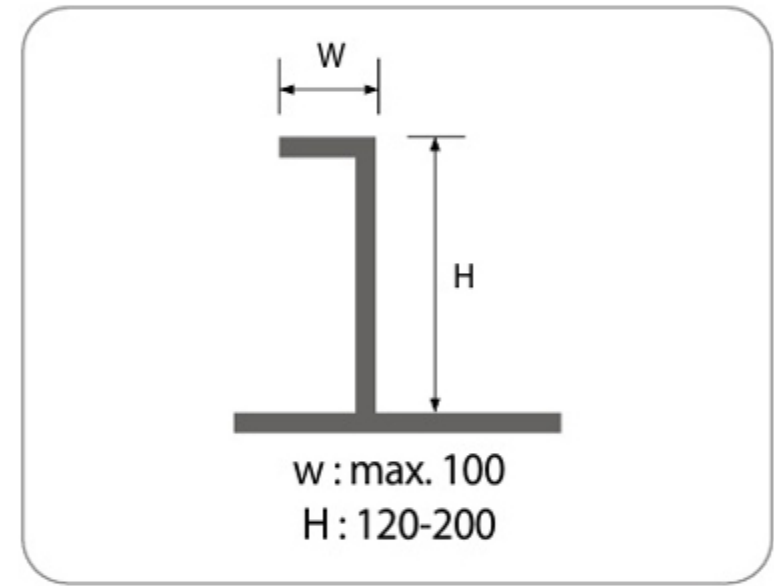

MAJOR PARTS	DESCRIPTIONS	SPECIFICATIONS
General	Size in mm(WHL), Weight	Carriage: 290 x 440 x 330, 9.0Kg Packing: 400 x 400 x 300, 14.0kg
	Input source	AC 100-240V, 50-60Hz, 1Phase Lithium-ion Battery 18Vdc 4.0Ah 8-10Hrs use
Traveling Unit	Power unit	24Vdc, 10W, 4500rpm
	Reducer	1:624 (gear ratio 1:1)
	Speed	0~860mm/min
	Power transmission	4 wheels chain driven
	Magnet location	Bottom on the carriage
X-Y slide	X-slide stroke	0~50mm
	Y-slide stroke	0~50mm
Extended torch	Torch adjustable angle	0-90°
	X-slide stroke	0~50mm
	Y-slide stroke	0~50mm
	Y-clamp slide stroke	0~80mm